








- Air nozzle made of stainless steel S303 with high resistance to temperature, abrasion and corrosion.
- 4 models available with different blowing powers.
- Designed for precision blowing, it achieves a solid stream jet blow by concentrating all the power at one point.
- Designed for accuracy in areas of difficult access.





 <b>Material</b> S303	 <b>Pressure</b> 1 MPa ca. 10 bar	 <b>Maximum temperature</b> 400 °C
 <b>Thread connection</b> 1/4" male	 <b>Weight</b> 19 g	 <b>Product code</b> 1/4M CCP 1.0A S303 1/4M CCP 1.5A S303 1/4M CCP 2.0A S303 1/4M CCP 2.5A S303

**Blowing pattern**

Solid stream jet blow 

**Dimensions (mm)**

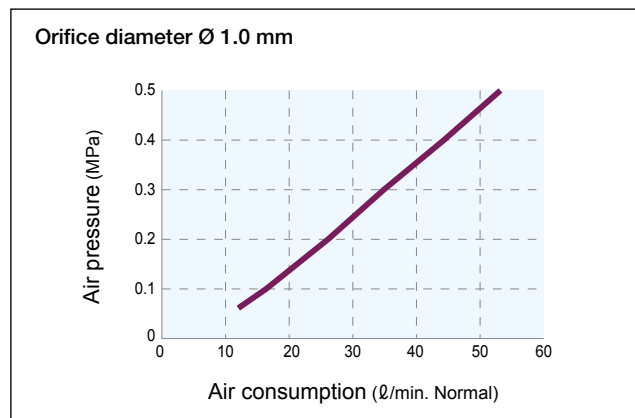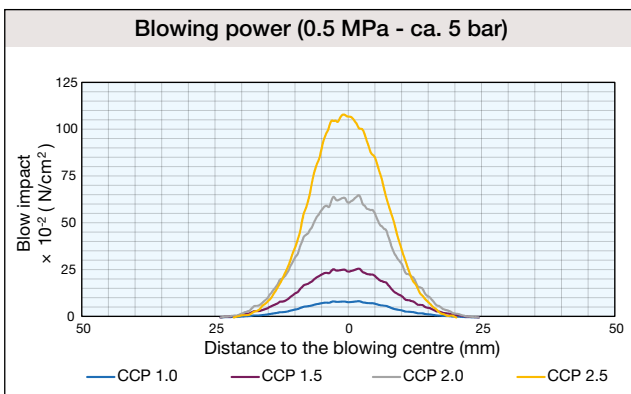

Ø Orifice diameter (Code)	Force (N) (0.5 MPa - ca. 5 bar)	Air consumption (l /min. Normal)					Orifice diameter (mm)	dB (A)
		0.1 MPa	0.2 MPa	0.3 MPa	0.4 MPa	0.5 MPa		
Ø1.0A	0.5	17	26	35	44	53	1.0	71
Ø1.5A	1.1	40	60	80	100	120	1.5	77
Ø2.0A	2.0	70	104	138	172	206	2.0	83
Ø2.5A	3.1	109	162	215	268	321	2.5	89

\*Standard data at 0.5 MPa (ca. 5 bar).